
Leica Lino L360 All around a visible line!

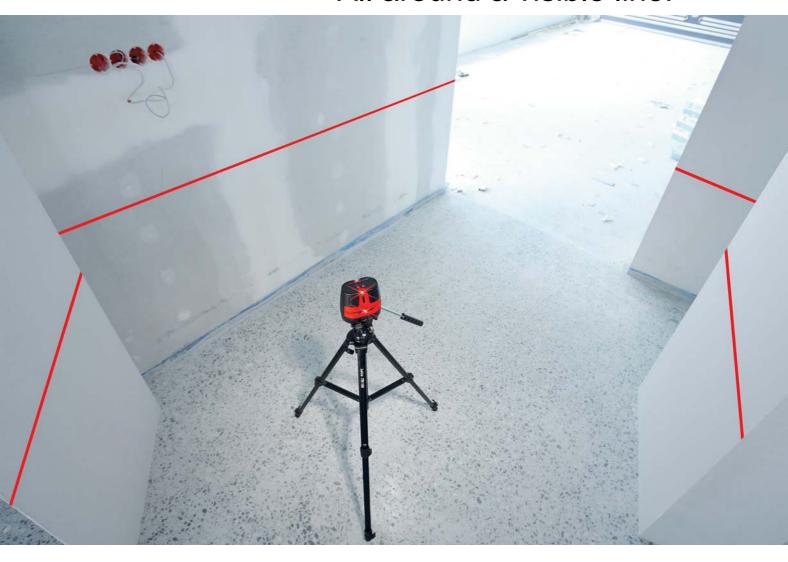

The 360° line laser

The Leica Lino L360 projects laser lines exactly, quickly and all around – increasing the working range to 360° . The proven Power Range TechnologyTM ensures the outstanding visibility of the lines. This combination makes the Lino L360 to a valuable partner at any construction site and allows perfect leveling and alignment.

Featured with

- 360° horizontal line close to the floor level
- 180° vertical line
- Well-damped pendulum-based self-leveling
- 1.5mm @ 5m horizontal accuracy
- Rechargeable battery pack for extended operating time
- Dust-proof and jet water protected IP65





360° horizontal line close to floor

You do not need to turn the device, to transfer reference point from one side to the opposite one. Furthermore the laser line is very close to the floor. This makes especially level checks very easy.



Pendulum based self-leveling

The instrument is set up quickly thanks to well-damped pendulum and effortlessly to project horizontal and vertical lines. Minor angular misalignments of 3.5°± 0.5° are compensated automatically. If the tilt is outside these limits, the laser lines are blinking to prevent errors.



Leica Lino L360

Art.No. 790509

- Leica Lino L360 Line Laser
- Target plate red
- Mini tripod adapter
- International charger with 4 plugs



Rechargeable Battery pack

No need to buy amounts of batteries. With the in-built rechargeable battery pack and extended operating time over 20 hours the L360 is a reliable tool on your construction site.



Clever mini tripod adapter

 \neg

It is much more than a small tripod. With the integrated magnets it can be fixed to steel or iron pipes and used as wall bracket. To fix it on a non magnetic surface, simply take a nail and hang it up.

Technical Specifications

Range	up to 15 m*
Range with detector	> 15 m
Leveling accuracy @ 5 m	± 1.5 mm
Self-leveling range	3.5° ± 0.5°
Accuracy of horizontal line @ 5 m	± 1.5 mm
Vertical accuracy @ 3 m line length	± 0.75 mm
Beam divergence	360° (horizontal)
Beam direction	vertical, horizontal
Laser type	635 nm laser class II
Batteries	rechargeable battery pack
Protection class	IP65
	Dust-proof and jet
	water protected
Operating temperature	- 10°C to 40°C
Storage temperature	-25°C to 70°C
Dimensions (HxDxW)	131.7 x 145 x 96.2 mm
Weight with batteries	1009 g
Tripod thread	1/4"

* Depending on lighting conditions

Illustrations, descriptions and technical specifications are not binding and may change. Copyright[©] Leica Geosystems AG, Heerbrugg, Switzerland, 2012.

Leica Geosystems AG Heerbrugg, Switzerland www.leica-geosystems.com





Laser class 2 In accordance with IEC 60825-1



Dealer stamp

 \Box

